



**Sun-In-One™**  
New Electrical Solar Light and Power Products



## SPECIFICATIONS

AVERAGE WATTAGE	7 Watts, 30 SMD
APPROXIMATE EQUIVALENC	90 Watt Incandescent
INPUT VOLTAGE	120-240 VAC 60Hz
COLOR TEMP (ANSI)	3200K (WW) or 6000K (CW)
CRI (COLOR RENDERING INDEX)	>80
OUTPUT	560 Lumens (LMC), 510 (DMC)
BEAM ANGLE	360 Degrees
DIMENSIONS	2.08" (D); 6.45 (L)
LIFE SPAN	>50,000 Hours
OPERATING TEMPERATURE	-5° F - 113° F
RATINGS	IP20 Indoor Applications
WARRANTY	5 Years
CERTIFICATIONS	CE, RoHS, UL
OPTIONS	External Driver in Bulk Order
BASE	E27/26 and GX24 Base
POWER FACTOR	0.98
LUX (1 METER DOWNWARD)	50 (DMC); 56 (LMC)

## Long Light LED Lamp 7 Watt 6.0 Inch



### FEATURES / BENEFITS

- 75% Energy Savings over Compact Fluorescent
- High Luminance and Low Power Consumption
- Super Long Life and Simple Installation
- Longer Life than CFL and Halogen
- No UV, No RF Interference
- No Mercury, and is RoHS Compliant

### ORDERING INFORMATION FOR LONG LIGHT LED LAMP 7 WATT 6.0 INCH – SKU OPTIONS:

**GL-LLH53-7W-6L-SMD30WW**

**GL-LLH53-7W-6L-SMD30CW**

**GL-LLH53-7W-6L-GX24-SMD30WW**

**GL-LLH53-7W-6L-GX24-SMD30CW**

**GL-LLH53-7W-6L-SMD30WW**

**GL-LLH53-7W-6L-SMD30CW**

**GL-LLH53-7W-6L-GX24-SMD30WW**

**GL-LLH53-7W-6L-GX24-SMD30CW**

(3700K) - 7Watt (internal driver)

(5500K) - 7Watt (internal driver)

(3700K) - 7Watt (internal driver)

(5500K) - 7Watt (internal driver)

(3700K)-XD - 7Watt (external driver)

(5500K)-XD - 7Watt (external driver)

(3700K)-XD - 7Watt (external driver)

(5500K)-XD - 7Watt (external driver)



**Sun-In-One™**  
suninone.com  
302-762-3100







**Sun-In-One™**  
New Electrical Solar Light and Power Products



## Long Light LED Lamp – 7 Watt 6.0 Inch, continued

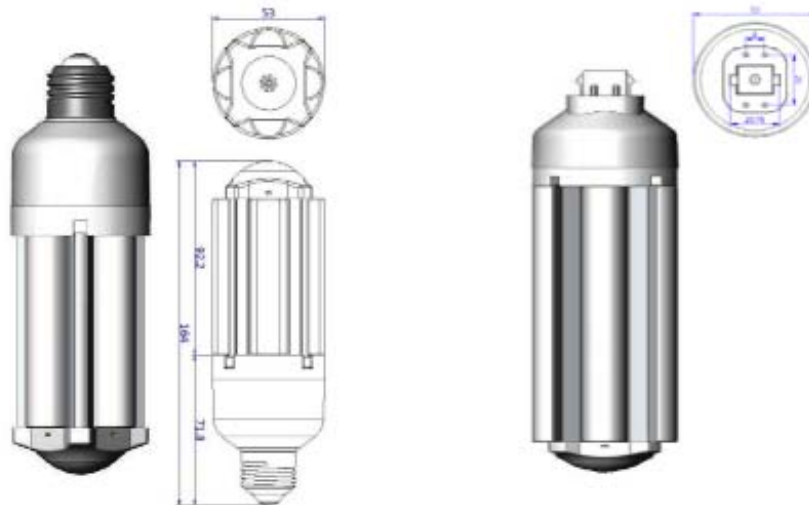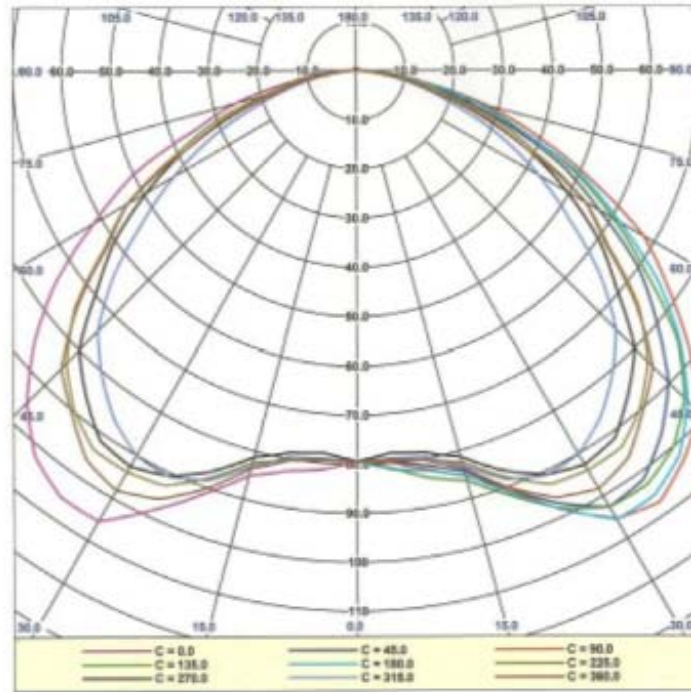

**Sun-In-One™**  
suninone.com  
302-762-3100